

# *K1550 katharometer based gas analyser*

## Features

- ◆ Gases measured include hydrogen, carbon dioxide and argon
- ◆ Hazardous-area sensor option
- ◆ 4 to 20mA isolated output
- ◆ Two user-configurable alarms
- ◆ Programmable alarms and analogue output
- ◆ Maintenance-free sensor



The Hitech K1550 accurately measures the changes of one constituent in binary or pseudo-binary gas mixtures (ie, mixtures in which only one constituent changes). Examples include hydrogen, carbon dioxide, argon, helium and various halogenated hydrocarbons such as the Freons. Almost any single constituent of a gas mixture can be measured providing its thermal conductivity differs from that of the other components. Ranges from high ppm to 100% are possible depending on the gas being measured.

A **katharometer sensor** measures the thermal conductivity of the gas. The sensor incorporates a highly sensitive, non-depleting element of low thermal capacity, which requires no maintenance. Signal processing and temperature compensation are provided by a microprocessor to give a level of accuracy and a range not normally associated with this type of sensor. Little or no calibration is required because of the system's inherent high stability.

**Measured values are presented** on a large, clear LCD which also displays messages and prompts for the menu-driven configuration and calibration routines.

**Two concentration alarms** provide visual (LED) indication and volt-free changeover contacts. They are user configurable for function (High, Low or Off) and hysteresis value.

**A high-level 4 to 20mA** output is provided; the span can be user programmed on most models.

**The instrument is packaged** in a standard DIN panel-mounting enclosure (96 x 144mm) with an optional locking door to IP54 sealing standard. The sensor can either be mounted within the enclosure or remotely, depending upon the application.

### OPTIONS

**For hazardous-area applications**, the sensor may be mounted remotely in the hazardous area and connected to the electronics unit in the safe area through

a suitable MTL intrinsically safe interface.

**For sampling**, a variety of systems is available and any necessary pumps, filters and take-off tubes can also be supplied.

**If oxygen measurement** is also required, the KG1550 is a dual gas analyser which measures oxygen and one other gas. See HPS119 for more details.

### Applications:

- ◆ Hydrogenation processes
- ◆ Gas purity
- ◆ Food processing
- ◆ Refrigeration systems
- ◆ Power generation
- ◆ Breweries

Metallurgical atmospheres

## SPECIFICATION

### Display

Dot matrix LCD registering 2 or 4 lines of alphanumeric characters

### Ranges

0 to 10%, to 0 to 100% (carbon dioxide, argon, neon, methane)

0 to 0.5%, to 0 to 100% (hydrogen, helium)  
Consult Hitech for other gases and ranges

### Stability

Better than 1 % fsd/month

### Accuracy

±1% fsd or ±2% fsd depending upon span and gas

### Sample flow

Between 100 and 300ml/min for optimum performance

### Sample temperature

-10°C to +40°C (non-condensing)

### Sample pressure

Set by vent pressure which must be nominally atmospheric

### Speed of response (typical)

(T90) 20s

### Sample connections

Inlet and outlet: captive seal compression fittings suitable for 0.25inch (or 6mm) outside diameter tube

### Output (signal)

4 to 20mA, proportional to 0 to 100% of span is provided as standard. User-programmable on most models.

Maximum load 1000kΩ

### Outputs (alarm)

Two alarms: each user-configurable to OFF, HIGH or LOW

Hysteresis: user-configurable

Relay outputs: rated 48V ac or dc, 0.5A, normally energised

### Ambient temperature

-5°C to +40°C

### Power supply

110/120V or 220/240V ac, 50/60Hz

Power consumption, 1 2VA


### Mounting

Electronics unit: panel mounting with two clamps

Remote sensor units: wall/ bulkhead (optional)

### Materials

Enclosure: glassfibre-reinforced Noryl to IP40 (IP54 locking door option)

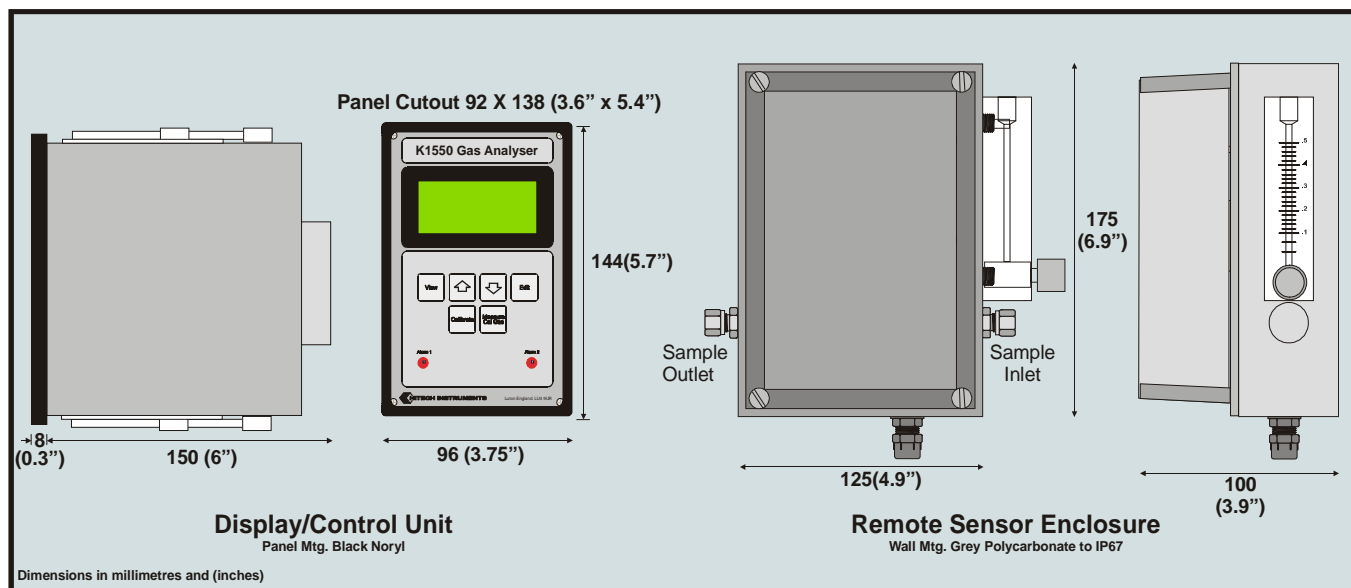

In keeping with a policy of continuous development, Hitech Instruments Ltd. reserves the right to change any part of this specification without notice

