

Micro Motion

7829 Visconic Viscosity Meter



Description

The 7829 Visconic viscosity meter is an accurate measurement instrument for continuous real time process control of liquid viscosity and density in pipelines, open sample loops and closed tanks.

It can be used for measurements where viscosity or density is the primary control parameter for the end product, or as an indicator of some other quality control parameter such as % solids or % concentration.

As part of its unique and rugged design the 7829 directly measures both dynamic viscosity and density, allowing a true measurement of kinematic viscosity which is the preferred parameter in many industries.

Advantages of the 7829 Visconic

- Fully integrated 'fit and forget' digital viscosity and density measurement for monitoring and control
- Two direct analog (4-20mA) outputs of viscosity and density, base density, or special calculation (% solids, °API, Specific Gravity, etc.)
- RS485/Modbus communications
- Low maintenance
- PC configuration tool for diagnostics and data logging

Applications include:

- Interface detection in multi product pipelines
- Mass flow when used in conjunction with a volumetric flow meter
- Sugar refining (°Brix)
- Slurries
- Evaporator control
- End point detection in batch reactions
- Solvent separation
- Wort gravity
- Coatings
- Product mixing


Principle of Operation

The sensor is a simple tuning fork maintained in vibration electronically. The density is a function of the resonant frequency, the viscosity is a function of the bandwidth.

7829 digitally measures the frequency at a point A (the lower -3db point) and then at point B (the upper -3db point) - see diagram. From these two measurements the on-board electronics can calculate the bandwidth (B-A), resonant frequency ((A+B)/2) and hence the Quality Factor (Resonant Frequency/Bandwidth), to give digitally determined values of the density and viscosity of the fluid.

$$Q = \frac{\text{Resonant Frequency}}{\text{Bandwidth}}$$

$$Q \propto \frac{1}{\sqrt{\text{Viscosity}}}$$

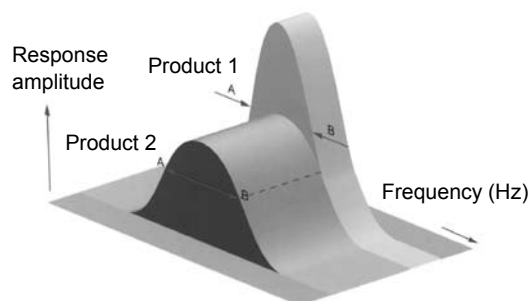

Product 1: Low viscosity
Product 2: High viscosity

Ordering information for standard forks


7829	Visconic viscosity transmitter											
	Code	Materials of construction										
	A	316 Stainless steel	316 Stainless steel tines									
	E	Hastelloy C22	Hastelloy C22 tines									
	H	Monel 400	Monel 400 tines									
	V	304 Stainless steel	304 Stainless steel tines									
	T	Titanium	Titanium tines									
	U	Hastelloy B2	Hastelloy B2 tines									
	C	316 Stainless steel	316 Stainless steel tines									
	D	Hastelloy C22	Hastelloy C22 tines									
	F	316 Stainless steel	316 Stainless steel tines									
	J	Monel 400	Monel 400 tines									
	G	Hastelloy C22	Hastelloy C22 tines									
	L	Monel 400	Monel 400 tines									
	Z	Special	PTFE laminated tines									
	Code	Amplifier system										
	C	Advanced: 4-20mA output ATEX II 2 G EEX d IIC T4 (Std.Fork, <200°C / 392°F)										
	D	Advanced: 4-20mA output CSA Class 1 Div 1 Groups C&D (Std.Fork, <200°C /392°F)										
	Code	Amplifier housing										
	A	Alloy										
	Z	Special										
	Code	Process connections										
	A	2" ANSI 150 RF	B 2" ANSI 300 RF									
	C	2" ANSI 600 RF										
	G	50 mm DIN 2527 DN 50/PN 40										
	H	50 mm DIN 2527 RF DN 50/PN 100										
	R	50 mm DIN 2527 DN 50/PN 16										
	K	3" Ladish Triclamp (Hygienic)										
	M	3" IDF (Hygienic)										
	N	1.5" Cone Seat Compression Fitting										
	Z	Special										
	Code	Stem length (nominal length)										
	A	0 mm : no stem extension and with standard spigot										
	Code	Default configuration 4-20mA output # / *										
	H	0-25cst										
	J	0-50cst										
	E	0-100cst										
	K	0-500cst										
	F	0-1000cst										
	Z	Special										
	Code	Calibration type										
	B	0.5 to 100cP										
	F	10-1000cP										
	Z	Special										
	Code	Calibration boundary										
	A	Free stream										
	B	2" schedule 40 boundary										
	C	3" schedule 40 boundary										
	D	2" schedule 80 boundary										
	E	3" schedule 80 boundary										
	G	3" Hygienic										
	Z	Special										
	Code	Reserved										
	B	Default										
	Code	Traceability										
	A	None										
	X	Certificates of material traceability										
	7829	A	C	A	A	A	H	B	A	B	A	Typical ordering information



* Analog output # Default setting: temperature

Ordering information for long stem forks

7829	Long stem Visconic viscosity transmitter	
	Code	Materials of construction
	A	316 Stainless steel, 316 stainless steel tines, standard finish
	C	316 Stainless steel, 316 stainless steel tines, Electro-polished
	F	316 Stainless steel, 316 stainless steel tines, PTFE laminated tines
	Z	Special
	Code	Amplifier system
	W	Safe Area: Advanced 4-20mA (long stem, <200°C / 392°F)
	K	Advanced: 4-20mA output ATEX II 1/2 G EEX d IIC T4 (<150°C / 302°F)
	L	Advanced: 4-20mA output CSA Class 1 Division 1 Group C & D, <160°C / 320°F
	Z	Special
	Code	Amplifier housing
	A	Alloy (cast)
	C	Stainless steel
	Code	Process connections
	A	2" ANSI 150 RF
	B	2" ANSI 300 RF
	C	2" ANSI 600 RF
	G	50 mm DIN 2527 DN 50/PN 40
	H	50 mm DIN 2527 RF DN 50/PN 100
	R	50 mm DIN 2527 DN 50/PN 16
	T	No Connectors (open tank) - safe area only
	Z	Special
	Code	Stem length (nominal length)
	C	500 mm / 20" with removable transit cover
	D	750 mm / 30" with removable transit cover
	E	1000 mm / 40" with removable transit cover
	F	1500 mm / 60" with removable transit cover
	G	2000 mm / 80" with removable transit cover
	H	3000 mm / 120" with removable transit cover
	J	4000 mm / 160" with removable transit cover
	Z	Special
	Code	Default configuration (Amplifier outputs)
	H	0-25cSt
	J	0-50cSt
	E	0-100cSt
	K	0-500cSt
	F	0-1000cSt
	Z	Special
	Code	Calibration type
	B	0.5 to 100cP
	F	10-1000cP
	Z	Special
	Code	Calibration boundary
	A	Free Stream
	Z	Special
	Code	Reserved
	B	Default
	Code	Traceability
	A	None
	X	Certs. of material traceability

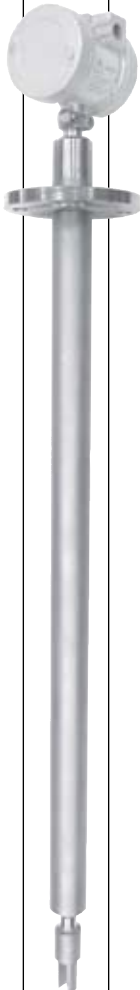

7829 A W A A C H B A B A Typical ordering information

Viscosity

Diagnostic tool

ADView is a software package provided by enabling you to:

- Configure our density and viscosity transmitters.
- View and save data from them.
- Check that they are functioning correctly.

ADView is installed on a PC and interacts with the 7829 Visconic viscosity meter through one of the PC's standard serial (RS-232) ports.

ADView provides many useful facilities, such as:

- Setting up serial link to communicate with the 7829 Visconic viscosity meter.
- Configuring the 7829 Visconic viscosity meter.
- Displaying data in real time, or as a graph.
- Logging data to a file.
- Verifying correct operation of the system, and diagnosing faults.
- Loading or storing Modbus register values.
- Read/write to individual Modbus registers.

Performance


Viscosity calibrated ranges	0.5 - 100cP, 10 to 1000cP
Viscosity accuracy	±1%span (±0.2cP in 0-10cP range)
Viscosity repeatability	±0.5% of reading

Specification


Density operating range:	0 - 3g/cc (0 - 3000kg/m ³) (0-187.4 lb/ft ³)
Calibrated range:	0.6 - 1.25g/cc (600-1250kg/m ³) (38.5-80.25 lb/ft ³)
Accuracy:	±0.001g/cc (±1.0kg/m ³) (±0.06 lb/ft ³)
Repeatability:	±0.0001g/cc (±0.1kg/m ³) (±0.006 lb/ft ³)
Temp. range: Process	-50°C to +200°C (-60°F to +392°F)
Ambient	-40°C to +85°C (-40°F to +185°F)
Pressure range (max working)	207bar (3000psi)
Viscosity range:	up to 20,000cP
Temperature sensor (integral)	PT100 BS1904 Class B, DIN 43760 Class B
4-20mA analog outputs:	Isolated, not self-powered
Controlled by:	Any user-selected parameter
Accuracy:	±0.1% reading, ±0.05%FS @20°C (68°F)
Repeatability:	±0.05%FS over range -40°C to +85°C (-40°F to +185°F)
RS485 Interface:	9600baud, Modbus (Modicon) RTU
Electrical connection	Screw terminal, cable entry to suit 1/2" NPT gland (20mm / 0.8" adaptor available)
Environment:	IP66
Power Supply:	20 to 28Vdc, 35-45mA
Wetted materials:	Stainless Steel, Hastelloy, Monel, Titanium
Tine finish:	Standard, PTFE coated or Electro-polished
Connections:	ANSI 150 to 600RF; DIN 50 PN40 and PN100 1.5" compression; IDF and RJT hygienic
Approvals:	ATEX II 2G EEx d IIC T4 CSA Class 1, Div 1, Group C & D T4 EMC: EN61326

Dimensions

Flange connection details

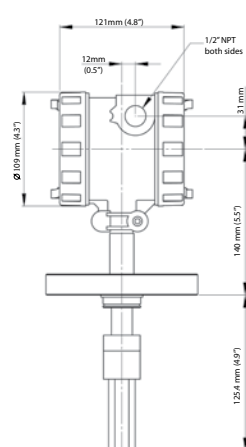

Cone seat connection details

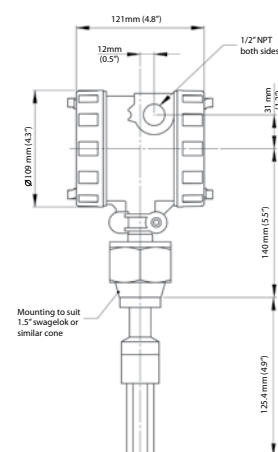

The Emerson logo is a trade mark and service mark of Emerson Electric Co.

Micro Motion is a registered trademark of Micro Motion Inc.

We reserve the right to modify or improve the designs or specifications of product and services at any time without notice.

USA:

Emerson Process Management
Micro Motion, Inc.
7070 Winchester Circle
Boulder, CO 80301
T +1 303-527-5200
+1 800-522-6277
F +1 303-530-8459
www.micromotion.com

International:

Emerson Process Management
Mobrey Measurement
158 Edinburgh Avenue,
Slough, Berks, SL1 4UE, UK
T +44 1753 756600
F +44 1753 823589
www.mobrey.com